

WICANDERS
NATURE'S COMFORT
AT YOUR FEET

NEW
CORK **PLANK**
MICRO BEVELED 4 SIDES

SERIES
100



WICANDERS[®]

CORK FLOORING SINCE 1868

Born of Nature, Fashioned for Living[™]

ORIGINALS COLLECTION



Accent

O81004



Character


O822005

MOODS COLLECTION



Tea

L81001



Chestnut

L832001



Auburn


L836001

TRACES COLLECTION




Spice

Q808002



Chestnut

Q832001



Auburn


Q836002

PRESIDENT COLLECTION




Spice

F808001




Tea

F810001



Chestnut

F832002



Chocolate Brown

F831001

WHAT'S NEW


Acrodur® by BASF

Wicanders flooring is now made with Acrodur®, a water based, eco-friendly binder used in the agglomeration process of cork. Acrodur® is 100% formaldehyde free promoting superior eco-efficiency and energy saving. A perfect combination between nature and technology.




Click Seal®

A glueless joint sealant, Click Seal® is designed to be applied on-site to the tongue side of planks, to eliminate core swelling caused by spills and excessive maintenance, and to offer a virtually waterproof floor in kitchens, entryways and other high-moisture environments



Wicanders Cork Plank is cut, stained, finished, beveled and packaged in the USA, creating a domestically manufactured product.

Amorim Flooring North America is a proud member of the US Green Building Council

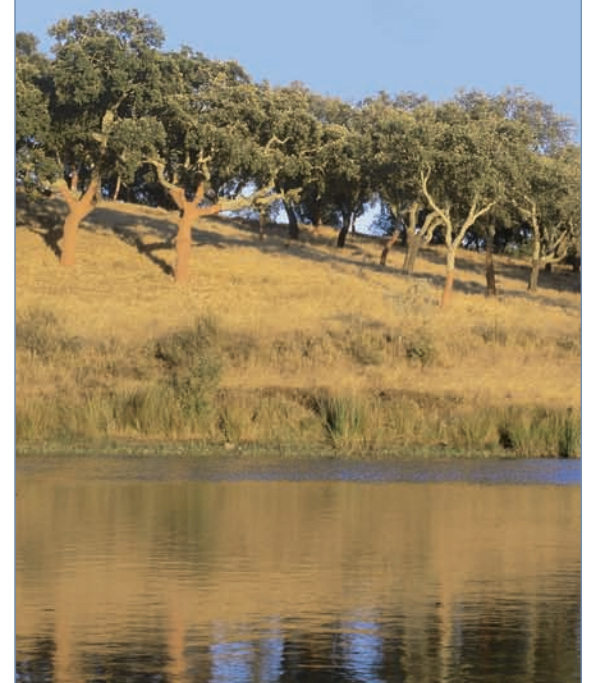

FEATURES:

Xtreme WRT Finish: A ceramic micro-bead finish 4x more wear resistant than other finishes in its class

Micro beveled on 4 sides


Improved Corkloc® Floating Floor System: Now easier than ever to install

Installation system: Floating

Dimensions: 35-7/8 x 4-3/8 x 7/16"

Warranty: 15 Year Residential, 5 Year Light Commercial

Suitable for: Kitchen, Family Room, Bedroom, Basement, Dining Room, Playroom, Hallway, Office

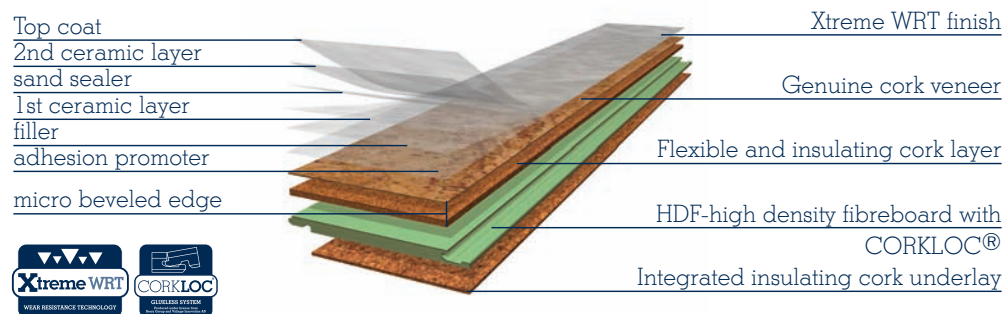

BENEFITS OF CORK PLANK



ENVIRONMENTALLY FRIENDLY

- Made of a renewable raw material
- Absorbs CO₂ reversing the effect of emissions
- Has very low VOC emission for healthier living



FAST AND EASY INSTALLATION

- Floating floors with Corkloc® locking system are easier and faster to install
- Saves time and reduces installation expense



QUIET

- The honeycomb-like inner structure of cork is guaranteed to reduce noise
- Cork reduces sound transmission between floors and within rooms



COMFORTABLE AND WARM

- Cork's shock absorbing properties relieve strain on feet, joints, legs and back
- The natural thermal insulation of Wicanders cork make the floor very warm to your bare feet



LOW AND EASY MAINTENANCE



- The special surface finishes of Wicanders floors make them easier to clean and maintain
- A vacuum cleaner and damp mop are all that is required



DURABLE

- The special WRT finish of Wicanders floors withstand years of wear and still look good as the day they were installed

Specifications

Test	Standard	Unit	Laying method
			Finishing
			Floating
			Xtreme WRT
			Series 100
Level of use			
Residential	EN685	class	 23
Commercial	EN685	class	 31
General properties			
Dimensions	EN 427/EN 428	mm inches	910x1111x10.5 35-7/8x4-3/8x7/16
Safety properties			
Critical radiant flux	ASTM E 648	Watts/Cm ²	.23
Specific optical density	ASTM E 662-97	Density	Flaming: 199/Non flaming: 177
Static coefficient friction	ASTM C1028-89	Coeff.	Dry: .65; Wet: .69
Additional properties			
Impact sound reduction	ISO 140-8	dB	16
Step sound	NF S 31-074	dB	78
STC sound transmission class	ASTM E413-87	dB	54
IIC Impact insulation class	ASTM E989-89	dB	58
Scratch resistance	EN 438	N	1.60
Impact resistance	EN 438	N mm (high falling)	Small ball: 14 Big ball: 1300
Effect of stains (a)	EN 438, part 2	Grade (1=surface destruction 5=No visible changes)	5 (b)
Chemical resistance	ASTM F925-97	Sulf. dulling Sulf. attack Color change	Rate 0 (c) No change No change

(a) The following products were tested: acetone, coffee, NaOH, Hydrogensuperoxyde (H2O2, 3%), Black shoe cream, Citrus acid (solution of 10%) • (b) Acetone causes grade 1 effects • (c) Rate 0 = no observed effect. The following products were tested: 5% acetic acid vinegar; 70% isopropyl alcohol, Mineral oil, NaOH Sodium oxide, 5% HCl Hydrochloric acid, 5% H2SO4 Sulfuric acid, 5% NaOCl Household ammonia, 5% Phenol disinfectant, Kerosene, Olive oil, Unleaded gasoline
Technical data subject to change

Supplied by:



Amorim Flooring North America
 2600 Cabover Drive, Suite A
 Hanover, MD 21076 · USA
 Tel: 410 553 6062 (6063 / 6064)
 Fax: 410 553 6123
 e-mail: info.ar.us@amorim.com
www.wicanders.com